



Domestic Non-Rising Stem Wedge Disc Gate Valves

Features

- Cap and chain included
- Solid wedge disc with tapered seats
- Other configurations are available, contact Dixon® for additional information

Materials


- Red iron handwheel, with brass cap and chain

Specification

- Working pressure: **300 PSI at 70°F (21°C)**

Approvals

- 2-1/2" UL, FM, and ULC

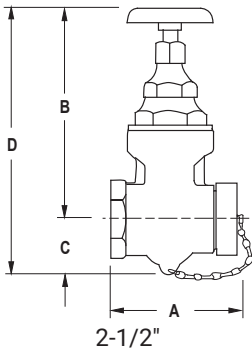

Inlet Female NPT	Outlet Male Thread	Cast Brass Part #
1-1/2"	1-1/2" NST (NH)	WDGV150F ^{1*}
2-1/2"	2-1/2" NST (NH)	WDGV250F
	2-1/2" NYFD	WDGV250NYFD
	2-1/2" NYC	WDGV250NYC
3"	2-1/2" NST (NH)	WDGV3025F-D*
		WDGV3025F-LB*

¹ Green handwheel
 * FM, UL, and ULC not approved

Dimensions

Size	A	B	C	D
1-1/2"	3-49/64"	5-5/8"	1-1/8"	6-6/8"
2-1/2"	6"	10-3/4"	2-1/2"	13-1/4"
3" x 2.5"	6-1/2"	9-1/2"	2-1/2"	12"



Global Non-Rising Stem Wedge Disc Gate Valves

Features

- Available finishes:
 cast (standard)
 polished trim - P
 cast chrome - RC
 polished chrome trim - C
- Custom male thread available
- Non-rising stem

Materials



- Cast brass with solid wedge disc and tapered seats
- Red iron wheel handle with cap and chain (cap not supplied on non-standard threads)
- Alloy = DZR brass
- Furnished with 2-1/2" NST brass cap and chain

Specification

- Working pressure: **300 PSI (2069 kPa)**

Approvals

- UL listed, FM approved, and ULC approved



Inlet Female NPT	Outlet Male NST	UL Listed	Cast DZR Brass Part #
2-1/2"	2-1/2"	yes	GWDGV250F

Dimensions

Size	A	B	C	D
2-1/2"	5"	7-3/4"	2-1/2"	10"

N