

Standard Couplings – Series-S, Style 11



**Applications**

- Designed for a wide range of applications including commercial/industrial construction, mining, and process piping

**Features**

- Housing design allows for optimum strength without excessive casting weight
- See pages 973, 977-978 for replacement gaskets, nuts, and bolts
- Victaulic's #77
- Grinnell's #7001


**Material**

- Ductile iron body with rust-inhibiting paint


**Approvals**

- UL listed and Factory Mutual approved

**Comparable to**



Nominal Size	Pipe O.D.	Maximum Working Pressure PSI at 70°F (21°C)	Maximum End Load (Lbs.)	Bolts		Ductile Iron			
				Qty	Size length	Part # with EPDM gasket	Part # with Nitrile Rubber gasket	Part # with FKM gasket	
1-1/2"	1.900"	1,000	2835	2	3/8"	2"	C115	C115BU	---
2"	2.375"		4430	2	1/2"	2-3/4"	C12	C12BU	C12V
2-1/2"	2.875"		6492	2	1/2"	2-3/4"	C125	C125BU	---
3"	3.500"		9621	2	1/2"	3"	C13	C13BU	C13V
4"	4.500"		15904	2	5/8"	3-1/4"	C14	C14BU	C14V
6"	6.625"		34472	2	3/4"	4-1/4"	C16	C16BU	---
8"	8.625"	800	46741	2	7/8"	5"	C18	C18BU	---
10"	10.750"		72610	2	7/8"	5"	C20	C20BU	---
12"	12.750"		102141	2	7/8"	5"	C24	C24BU	---

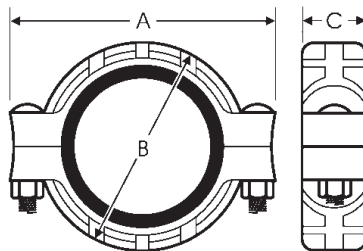

Dimensions

A	B	C
4-5/8"	3"	1-7/8"
5-15/64"	3-45/64"	1-27/32"
5-5/8"	4-1/4"	1-27/32"
6-21/32"	5"	1-27/32"
8-17/64"	6-3/8"	2-3/64"
11-7/32"	8-57/64"	2-3/64"
14-1/64"	11-3/8"	2-23/64"
16-5/8"	13-1/2"	2-5/8"
18-5/8"	15-1/2"	2-5/8"

P