

Watts Filters

F602-Series Hi-Flow

Features

- 40 micron polypropylene element

Specifications

- Automatic drain operating conditions:
 - temperature range: **40°F (4°C) to 120°F (49°C)**
 - maximum operating: 175 PSIG (12 bar)
- Manual drain operating conditions:
 - temperature range: **40°F (4°C) to 150°F (66°C)**
 - maximum operating: 250 PSIG (17 bar)

Zinc Body with Sight Glass and 16" Bowl

Size	Flow (SCFM)	Automatic Drain Part #	Manual Drain Part #
3/4"	270	F602-06WJR	F602-06WJ
1"	300	F602-08WJR	F602-08WJ
1-1/2"	450	F602-12WJR	F602-12WJ



Aluminum Body with 26" Bowl

Size	Flow (SCFM)	Automatic Drain Part #	Manual Drain Part #
2"	1200	F602-16WJR	F602-16WJ

NOTE: See pages 343 - 344 for accessories.

SCFM ratings given at 90 PSIG inlet pressure.

FRLs are designed for air service only, unless  otherwise indicated. Obsolete once stock is depleted.

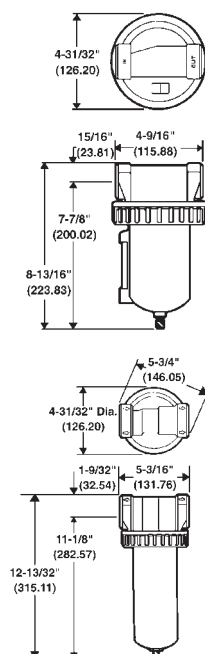

F