

Boss Adapters

Female NPT

Features

- Designed to fit the standard ground joint spuds on pages 162-163
- Supplied with a wing nut, as shown
- For safety tags and safety tape, see pages 1076-1077

Size	Plated Steel and/or Iron Part #	316 Stainless Steel Part #
3/4"	GFAS6	RGFAS6
1"	GFAS11	RGFAS11
1-1/4"	GFAS16	---
1-1/2"	GFAS21 ¹	---
2"	GFAS26	---
3"	GFAS36	---
4"	GFAS46	---



D

¹ Part is produced as a welded fabrication

Male NPT

Size	Plated Steel and/or Iron Part #	316 Stainless Steel Part #
3/4"	GMAS6	RGMAS6
1"	GMAS11	---
1-1/4"	GMAS16	---
1-1/2"	GMAS21	---
2"	GMAS26 ¹	RGMAS26
3"	GMAS36	---
4"	GMAS46	---




¹ Uses a special wing nut, part # B27-1

Boss Washer Seal Couplings with Female Spud

Features


- Easy to seal
- Klingersil® C-4401 washer is inserted between the stem and spud
- Leakproof seal forms by rotating the wing nut and hammering it tight
- Use with Boss clamps found on pages 169-170
- Use with wing nuts found on page 164

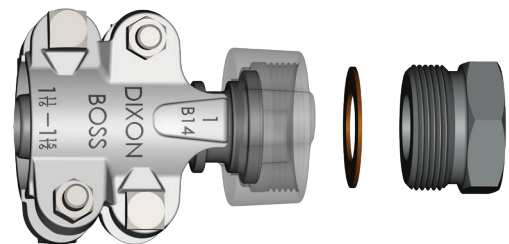

Specification

- Recommended for steam service up to 450°F (232°C)

Hose Shank x NPT	Plated Steel and/or Iron Part #	316 Stainless Steel Part #
3/8"	WF3	---
1/2"	WF6	---
1/2" x 3/4"	WF26-1	---
3/4"	WF26	RWF26
1"	WF36	RWF36
1-1/4"	WF51	RWF51
1-1/2"	WF61	RWF61
2"	WF81 ¹	RWF81 ¹
2-1/2"	WF96	---
3"	WF111	---

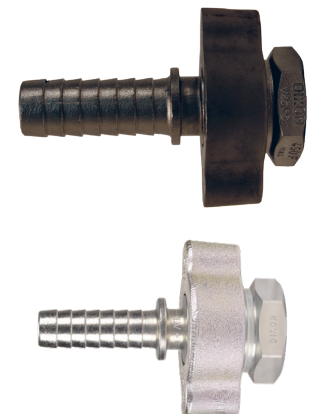

¹ Not to be used with #250, #275, or #306 Boss clamps

