

Wilkerson® FRLs

C03-Series Miniature Combination Units

Features

- Included components: (2) adapters

Filter series F03:

- 5 micron element
- .5 oz. bowl

Regulator series R03:

- 2-125 PSI adjusting range
- Balanced valve design
- Self-relieving
- Supplied with a GC620 gauge
- Can be mounted with knob in up or down position

Lubricator series L03:


- 1 oz. bowl
- Adjustable oil feed
- Full view sight dome

Specifications

- Maximum operating conditions:
 - transparent bowl: **150 PSIG (10.3 bar)** and **32°F to 125°F (0°C to 52°C)**
 - metal bowl: **250 PSIG (17.2 bar)** and **32°F to 175°F (0°C to 80°C)**



Transparent bowl



Size	Flow (SCFM)	Transparent Bowl and Guard		Metal Bowl	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
1/8"	20	C03-01A	C03-01M	C03-01AMB	C03-01MMB
1/4"	20	C03-02A	C03-02M	C03-02AMB	C03-02MMB

NOTE: SCFM ratings at **100 PSIG** inlet pressure.

C08-Series Miniature Combination Units

Features

- Included components: (2) mounting brackets with joiner set

Filter series F08:

- 5 micron element
- .6 oz. bowl

Regulator series R08:

- 0-125 PSI adjusting range
- Balanced valve design
- Self-relieving
- Supplied with a 0-160 PSI flush mount style gauge

Lubricator series L08:


- .6 oz. bowl
- Adjustable oil feed
- Full view sight dome

Specifications

- Maximum operating conditions:
 - transparent bowl: **150 PSIG (10.3 bar)** and **14°F to 125°F (-10°C to 52°C)**
 - metal bowl: **250 PSIG (17.2 bar)** and **14°F to 150°F (-10°C to 65.5°C)**



Metal bowl

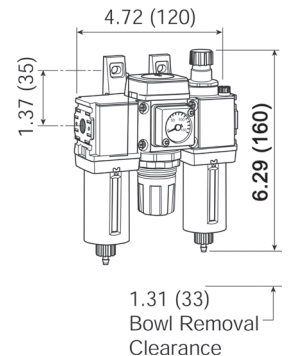

Size	Flow (SCFM)	Transparent Bowl and Guard		Metal Bowl	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
1/4"	27	C08-02A	C08-02M	C08-02AMB	C08-02MMB

NOTE: SCFM ratings at **100 PSIG** inlet pressure.
 FRLs are designed for air service only, unless otherwise indicated.

