

Series 1 FRLs

B17-Series Filter/Regulator



Automatic


Features

- 5 micron
- 1 qt. reservoir
- Supplied with gauge

Specification

- Adjusting pressure range **5-125 PSI**
- Max pressure **250 PSIG (17.2 bar)** and temperature range **-30°F to 175°F (-34C to 80C)**

Port Size	Flow (SCFM)	Automatic Part #	Manual Part #
1"	650	B17-08AGMB	B17-08MGMB

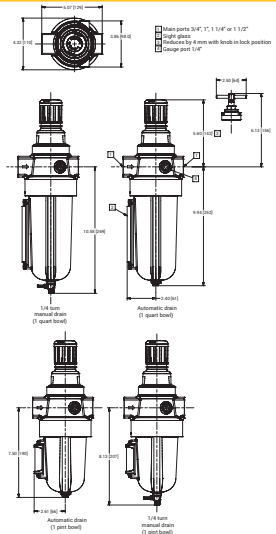

F

L72-Series Sub-Compact Micro-Fog Lubricators

Applications

- Micro-fog lubricators, identified by a red adjusting screw, are used for applications containing one or more points of lubrication, cylinders, and multiple or single tools
- Air flow through the lubricator lifts oil from the reservoir to the sight-feed dome; oil is dropped into the fog generator and atomized into a fine mist; lightweight particles are delivered downstream for lubrication; heavier particles fall back into the reservoir
- The micro-fog lubricator delivers 10% of the oil drops visible through the transparent sight-feed dome
- Micro-fog lubricators cannot be filled under pressure

Features

- 2 oz. reservoir
- In-line or modular installation
- Quick release bayonet bowl
- Micro-fog design delivers aerosol mist


Specifications

- Recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F (38°C)**
- Maximum operating conditions:
  - transparent bowl: max pressure **150 PSIG (10 bar)** and temperature range **-30°F to 125°F (-34°C to 51°C)**
  - metal bowl: max pressure **250 PSIG (17.2 bar)** and temperature range **-30°F to 150°F (-34°C to 66°C)**



with transparent bowl

Port Size	Flow (SCFM)	Transparent Bowl Part #	Metal Bowl Part #
1/4"	51	L72M-2	L72M-2MB



\*\* minimum clearance required to remove bowl

NOTE: SCFM ratings given at **90 PSIG** inlet pressure.

L73-Series Compact Micro-Fog Lubricators

Features

- 4 oz. reservoir
- In-line or modular installation
- Quick release bayonet bowl
- Micro-fog design delivers aerosol mist


Specifications

- Recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F (38°C)**
- Maximum operating conditions:
  - transparent bowl: max pressure **150 PSIG (10.3 bar)** and temperature range **-30°F to 125°F (-34°C to 51°C)**
  - metal bowl: max pressure **250 PSIG (17.2 bar)** and temperature range **-30°F to 175°F (-34°C to 80°C)**



with transparent bowl

Port Size	Flow (SCFM)	Transparent Bowl Part #	Metal Bowl Part #
1/4"	60	L73M-2	L73M-2MB
3/8"	60	L73M-3	L73M-3MB
1/2"	60	L73M-4	L73M-4MB



NOTE: SCFM ratings given at **90 PSIG** inlet pressure  
 FRLs are designed for air service only, unless otherwise indicated.  
 See pages 346-348 for accessories.

