



High Purity BioPharm Fittings

Solid End Caps – T16AMP

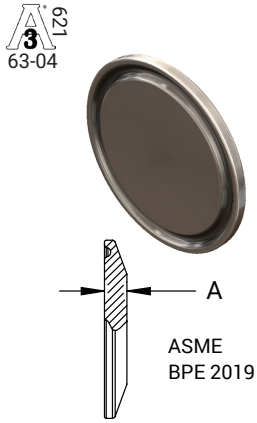

BPE Table DT-4.1.5-2

Tube O.D.	A (in)	PL Finish – SF1	PM Finish – SF4
1/2" – 3/4"	0.187	T16AMP-050075PL	T16AMP-050075PM
1" – 1-1/2"	0.250	T16AMP-100150PL	T16AMP-100150PM
2"		T16AMP-200PL	T16AMP-200PM
2-1/2"		T16AMP-250PL	T16AMP-250PM
3"		T16AMP-300PL	T16AMP-300PM
4"		0.312	T16AMP-400PL
6"	0.437	T16AMP-600PL	T16AMP-600PM

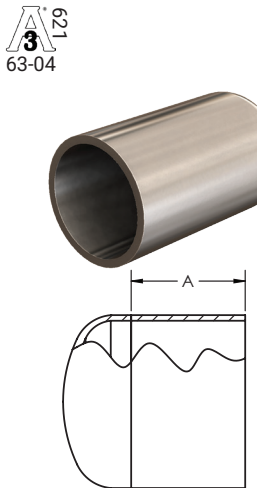

BPE Table DT-4.1.5-1
ASME BPE 2024 Type A

Weld Caps – T16WA

Tube O.D.	A (in)	Nominal Wall (in)	PL Finish – SF1	PM Finish – SF4	
1/2"	1.500	0.065	T16WA-050PL	T16WA-050PM	
3/4"			T16WA-075PL	T16WA-075PM	
1"			T16WA-100PL	T16WA-100PM	
1-1/2"			T16WA-150PL	T16WA-150PM	
2"			T16WA-200PL	T16WA-200PM	
2-1/2"			T16WA-250PL	T16WA-250PM	
3"	1.750	0.083	T16WA-300PL	T16WA-300PM	
4"	2.000		T16WA-400PL	T16WA-400PM	
6"	2.500		0.109	T16WA-600PL	T16WA-600PM

NOTE: BPE 2019 Specifications:

PL Finish – SF1

O.D. = 32Ra Mechanically Polished

I.D. = 20Ra Mechanically Polished

PM Finish – SF4

O.D. = 32Ra Mechanically Polished

I.D. = 15Ra Mechanically Polished and Electropolished