


Wilkerson® FRLs

F16-Series Compact Airline Filters

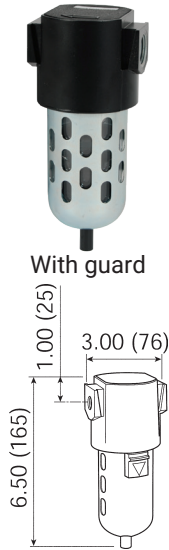

Features

- 5 micron element
- 2.7 oz. bowl

Specifications


- Maximum operating conditions:
 - transparent bowl: **150 PSIG (10.3 bar)** and **32°F to 125°F (0°C to 52°C)**
 - metal bowl: **200 PSIG (13.8 bar)** and **32°F to 150°F (0°C to 65.5°C)**

Size	Flow (SCFM)	Transparent Bowl and Guard		Metal Bowl	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
1/4"	63.0	F16-02A	F16-02M	F16-02AMB	F16-02MMB
3/8"	74.1	F16-03A	F16-03M	---	F16-03MMB
1/2"	80.4	F16-04A	F16-04M	F16-04AMB	F16-04MMB

F



Transparent bowl with guard



F18-Series Compact Airline Filters

Features

- High flow capacity
- 5 micron element
- 1.72 oz. bowl


Specifications

- Maximum operating conditions:
 - transparent bowl: **150 PSIG (10.3 bar)** and **-13°F to 125°F (-25°C to 52°C)**
 - metal bowl: **250 PSIG (17.2 bar)** and **-13°F to 150°F (-25°C to 65.5°C)**

Size	Flow (SCFM)	Transparent Bowl and Guard		Metal Bowl with Sight Glass	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
1/4"	50	F18-02A	F18-02M	F18-02AMB	F18-02MMB
3/8"	78	F18-03A	F18-03M	F18-03AMB	F18-03MMB
1/2"	82	F18-04A	F18-04M	F18-04AMB	F18-04MMB



With guard



F26-Series Standard Airline Filters

Features

- 5 micron element
- 3.2 oz. bowl

Specifications

- Maximum operating conditions:
 - transparent bowl: **150 PSIG (10.3 bar)** and **32°F to 125°F (0°C to 52°C)**
 - metal bowl: **200 PSIG (13.8 bar)** and **32°F to 150°F (0°C to 65.5°C)**

Size	Flow (SCFM)	Transparent Bowl and Guard		Metal Bowl with Sight Glass	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
3/8"	117.8	F26-03A	F26-03M	F26-03AMB	F26-03MMB
1/2"	149.8	F26-04A	F26-04M	F26-04AMB	F26-04MMB

NOTE: SCFM ratings at **150 PSIG** inlet pressure.
 See pages 322-326 for accessories.
 FRLs are designed for air service only, unless otherwise indicated.

